Precision Engineering

Maximum Performance



AVK *SERIES*

GRAVITY ROLLER CONVEYOR


AVK *SERIES* | GRAVITY ROLLER CONVEYOR


Designed for seamless integration with automated systems, the AVK Conveyor features precision side guides that ensure products are fed into the machine in accurate, consistent alignment.
Fully compatible with both automatic and manual sealing units across diverse dimensional ranges, the system readily adapts to varied production demands via its adjustable belt speed.
While its powerful turbo airflow system ensures high-speed, premium-quality packaging results, superior thermal insulation combined with low energy consumption maximizes operational efficiency.

Highlights
Features


- Features rotating carrier rod/mesh conveyor rollers specifically designed for POF film.
- Digitally locked PID temperature control system.
- Automatic cooldown shut-off safety triggered when temperature drops to 90°C.
- Stainless steel, easily replaceable heating elements.
- High shrink packaging speed.
- Adjustable air baffles for precise airflow direction and control.
- Suitable for PVC, POF, and PE films.
- Silicone-coated conveyor rods.
- 1-year warranty (excluding wear parts) and 5-year spare parts supply guarantee.
- Compliance with CE standards.

Model Serisi	Conv. Lenght	Conv. Width	Conv. Height	Ø	P
AVK-45	1000 / 1500 / 2000 mm	450 mm	850–900 mm	20 mm	25 mm
AVK-55	1000 / 1500 / 2000 mm	550 mm	850–900 mm	20 mm	25 mm
AVK-65	1000 / 1500 / 2000 mm	650 mm	850–900 mm	40 mm	50 mm
AVK-75	1000 / 1500 / 2000 mm	750 mm	850–900 mm	40 mm	50 mm
AVK-85	1000 / 1500 / 2000 mm	850 mm	850–900 mm	40 mm	50 mm

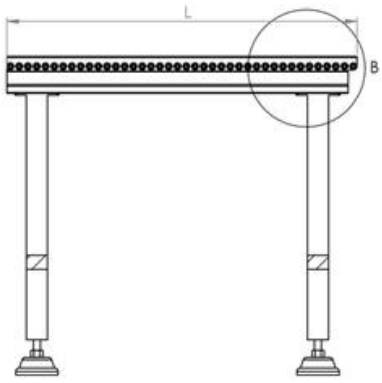





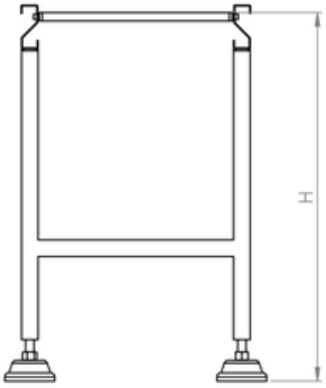

Precision Engineering

Maximum Performance



AVK *SERİSİ*

AVARE RULOLU KONVEYÖR

AVK SERİSİ | AVARE RULOLU KONVEYÖR

Otomatik makinelerle uyumlu çalışan AVK Konveyör, yan bariyeri sayesinde ürünlerin makineye doğru ve düzgün bir hizada girmesini sağlar.
Ölçülerine göre tüm otomatik ve manuel kesme üniteleriyle uyum içerisinde çalışabilen sistem, ayarlanabilir bant hızı ile farklı üretim ihtiyaçlarına kolayca adapte olur.
Güçlü turbosu sayesinde kaliteli ve hızlı ambalaj elde edilirken, mükemmel ısı yalıtımı ve düşük enerji tüketimi ile operasyonel verimlilik sağlanır.

Öne Çıkan **Özellikler**

- POF film için kendi etrafında dönen taşıyıcı mil bantlara sahiptir.
- Dijital olarak sabitlenebilen PID ısı kontrol sistemi.
- 90°C'ye düşüldüğünde devreye giren otomatik kapanma emniyeti.
- Paslanmaz, kolay değiştirilebilir rezistanslar.
- Yüksek shrinkleme hızı.
- Hava akışını kontrol etmek için ayarlanabilir yönlendiriciler.
- PVC, POF ve PE filmler için uygundur.
- Silikon kaplamalı taşıyıcı mil bantları.
- Yıpranabilir parçalar hariç 1 yıl garanti, 5 yıl yedek parça tedarik desteği.
- CE standartlarına uygunluk.

Model Serisi	Konveyör Uzunluğu (L)	Konveyör Genişliği (W)	Konveyör Yüksekliği (H)	Ø	P
AVK-45	1000 / 1500 / 2000 mm	450 mm	850–900 mm	20 mm	25 mm
AVK-55	1000 / 1500 / 2000 mm	550 mm	850–900 mm	20 mm	25 mm
AVK-65	1000 / 1500 / 2000 mm	650 mm	850–900 mm	40 mm	50 mm
AVK-75	1000 / 1500 / 2000 mm	750 mm	850–900 mm	40 mm	50 mm
AVK-85	1000 / 1500 / 2000 mm	850 mm	850–900 mm	40 mm	50 mm

